


ROTORS SPRAYS VALVES CONTROLLERS SENSORS CENTRAL CONTROLS MICRO

# RZWS

## Root Zone Watering System

# Hunter®

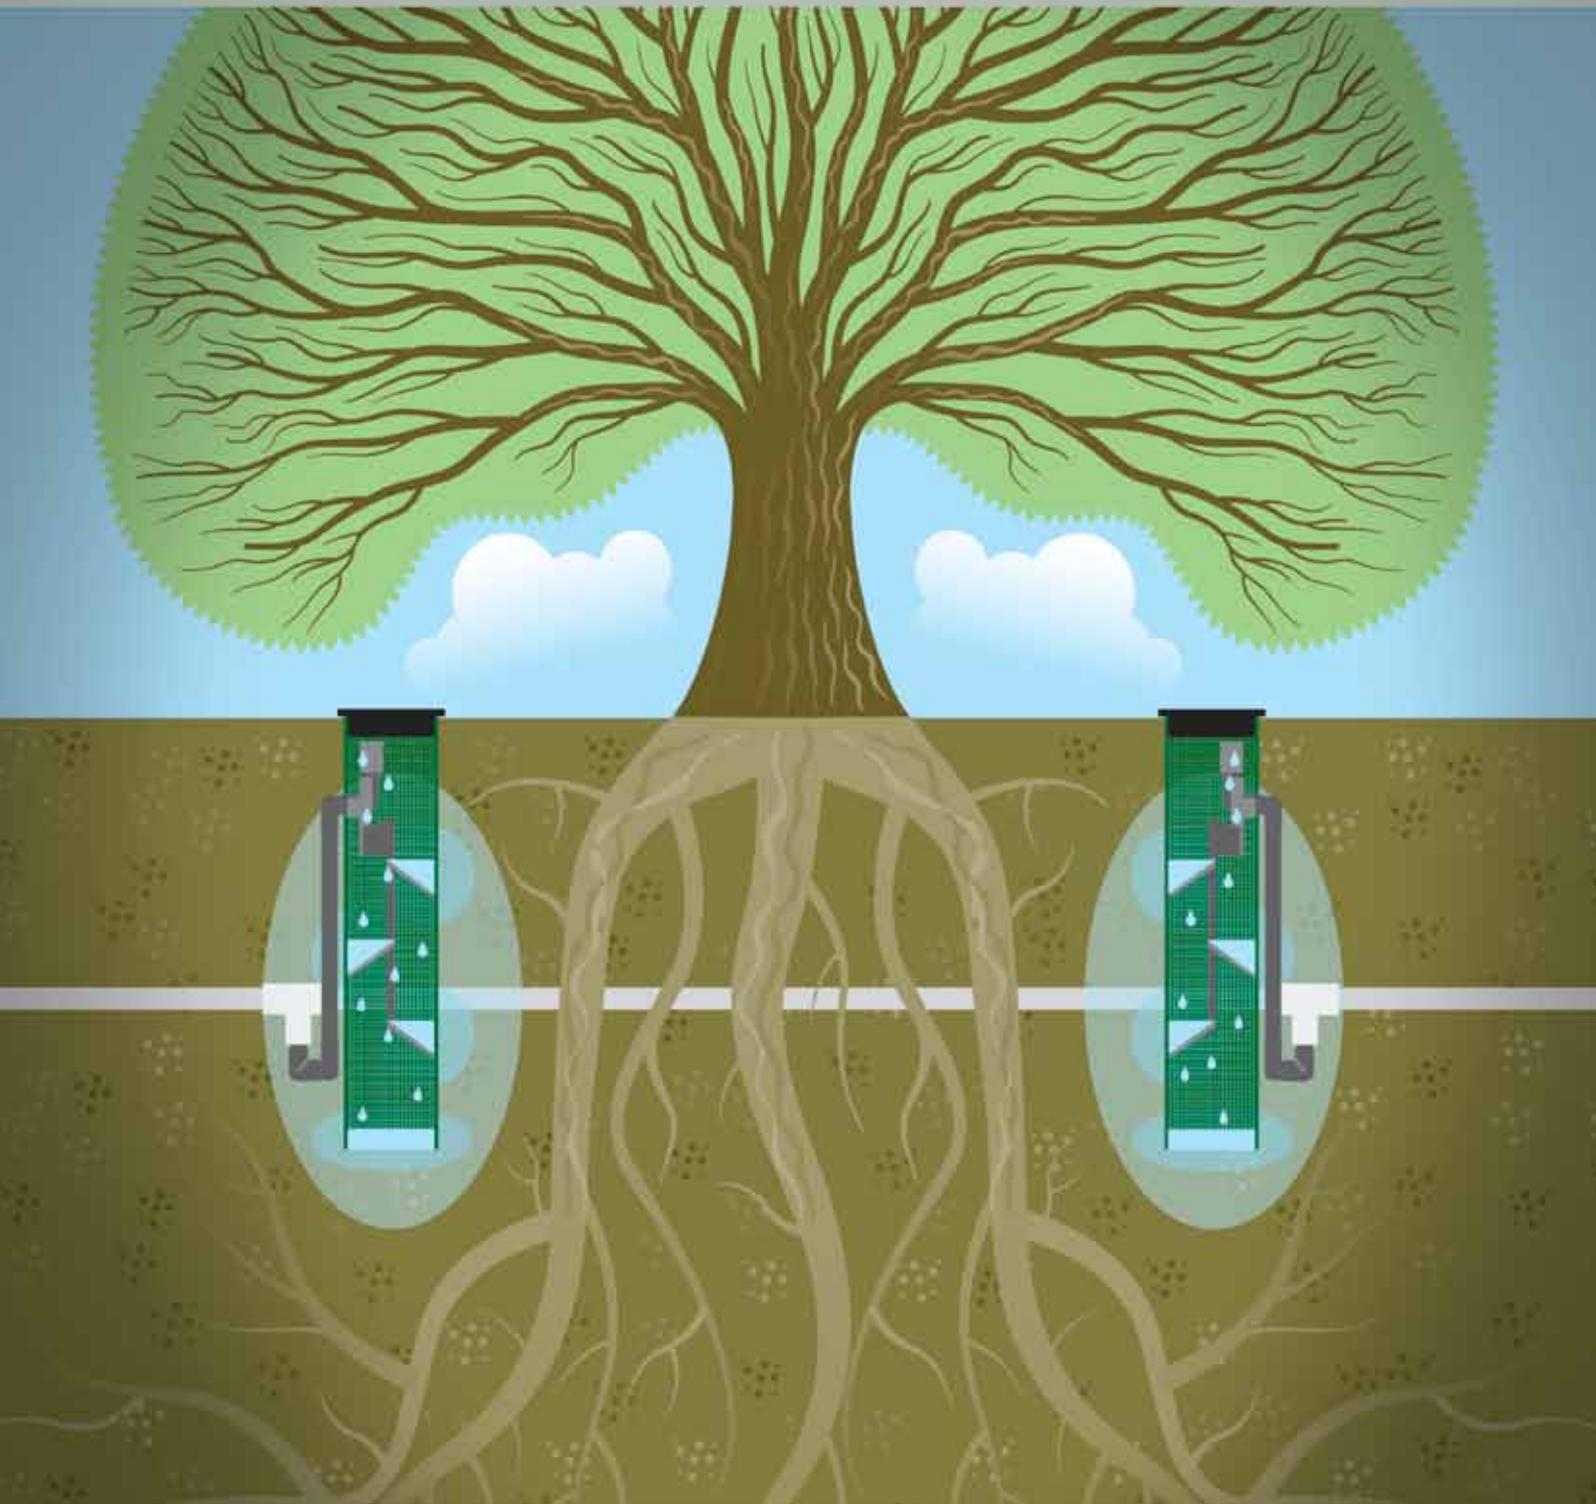

# RZWS

## Root Zone Watering System



Shrubbery

Small Trees,  
Large Bushes  
& Shrubbery

Large &  
Small Trees

0.9 m RZWS  
0.46 m RZWS  
0.25 m RZWS

If you want young plants and trees to thrive, start 'em out right. Using both near-the-surface and deep root watering encourages roots to grow deep and stay safely below the surface. The equation is simple: water + oxygen + vital nutrients = healthy root systems. Developed to meet this challenge, the RZWS Root Zone Watering System features Hunter's patented StrataRoot design. It's a series of internal baffles that delivers water where it's needed most. Design also lends rigidity to the irrigation cylinder to facilitate installation. Comes pre-assembled to save time. Better still, the enclosed design and grate protect irrigation hardware from vandalism. To find the right solution, sometimes you just have to dig deep.



0.25 m (10") RZWS


0.46 m (18") RZWS

0.9 m (36") RZWS

*In sandy soil conditions, the optional RZWS sleeve keeps the interior free from soil intrusion.*

## STRATAROOT SYSTEM DELIVERS WATER TO ROOTS AT ALL SOIL DEPTHS

Eliminate wasteful run-off by putting water right where it's needed: in the ground, at the roots.

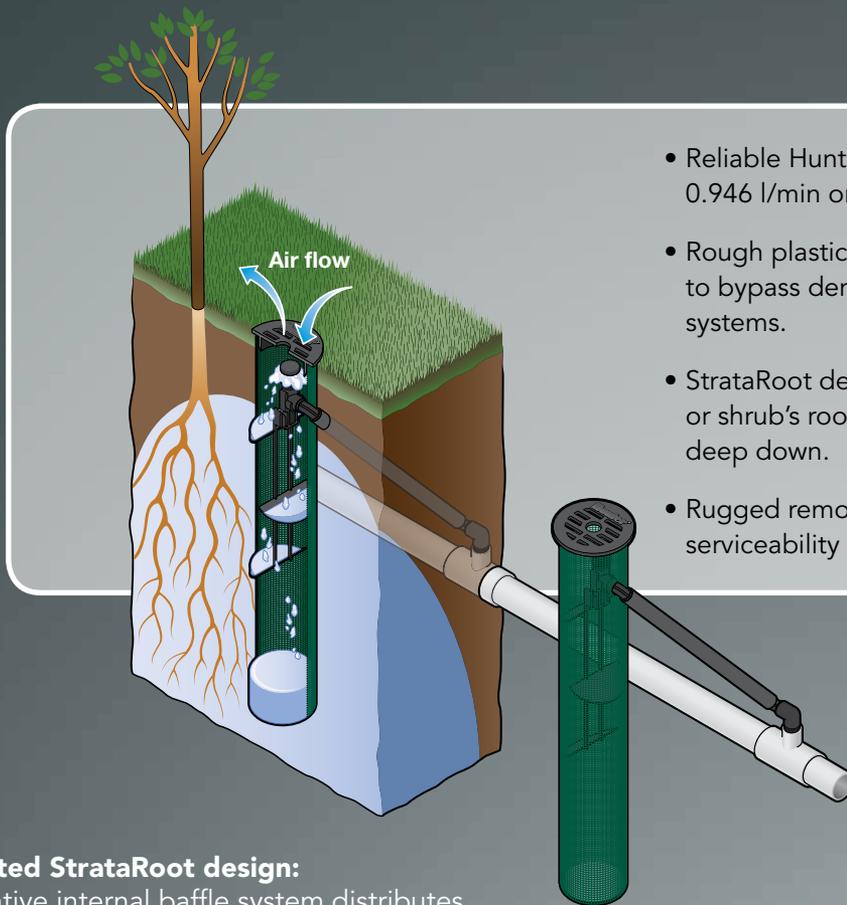

- Reliable Hunter Bubbler available with 0.946 l/min or 1.89 l/min flow.
- Rough plastic mesh allows water, air, and nutrients to bypass dense soil and directly reach root systems.
- StrataRoot delivers water to all levels of the tree or shrub's root system, near the surface and deep down.
- Rugged removable end cap allows easy serviceability of bubblers and check valves.

### Patented StrataRoot design:

Innovative internal baffle system distributes water near the surface and down deep to foster roots.

### Pre-assembled watering system:

Each unit is ready to go for fast installation.

### Premium pressure-compensating bubbler:

Two bubbler options: 0.946 l/min or 1.89 l/min.

### Built-in swing joint on bubbler models:

Maximum flexibility and easy installation.

### Sturdy removable end cap:

Protects the RZWS yet allows bubbler and check valve to be serviced.

### Long-lasting pre-installed check valve option:

Valve prevents low-head drainage.

### Optional fabric filter sleeve:

Keeps sandy soil out of the irrigation well.

### Optional reclaimed end cap



# RZWS

# Charts and Specs

SPECIFICATIONBUILDER			
MODEL	LENGTH	BUBBLER FLOW RATE	OPTIONS
<b>RZWS</b> = Root Zone Watering System RZWS-SLEEVE = Field installed sleeve made from landscape filter fabric RZWS-CAP = Replacement cap for all RZWS models	10 = 0.25 m <b>18</b> = 0.46 m 36 = 0.9 m	<b>25</b> = 0.946 l/min 50 = 1.89 l/min	<b>CV</b> = Check Valve R = Reclaimed
▶ <b>RZWS</b>	▶ <b>18</b>	▶ <b>25</b>	▶ <b>CV</b>
EXAMPLE ▶	<b>RZWS – 18 – 25 - CV</b>		