

MP ROTATOR STAKE KIT

Models: **Standard and Pressure-Regulated Staking Kits**


Designed for easy implementation with any water-efficient MP Rotator Nozzle, MP Stake Kits come preassembled for quick installation in the field.

KEY BENEFITS

- Pair with any high-efficiency MP Rotator Nozzle to simplify temporary irrigation
- Preassembled for fast and easy installation in the field
- Standard kit includes a 66 cm stake, nozzle adapter, 0.345" (9 mm) tubing, and ½" threaded male fitting for quick connection
- For maximum water savings, upgrade to a 2.8 bar (280 kPa) pressure regulator and Hunter Check Valve

OPERATING SPECIFICATIONS

- Operational pressure range: 2.1 to 4.8 bar (210 to 480 kPa)

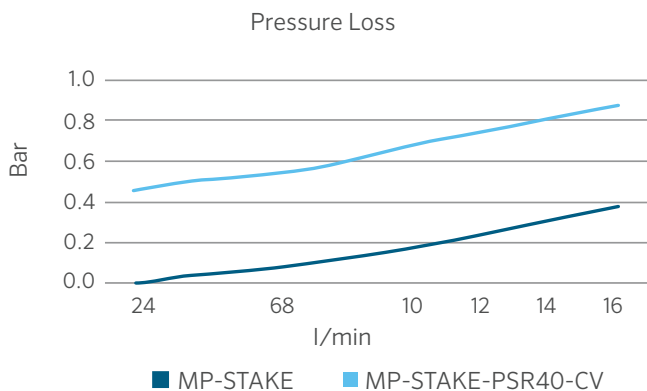

MP-STAKE

Total height: 71 cm
Male threaded connection: ½"

MP-STAKE-PSR40-CV

Total height: 86 cm
Male threaded connection: ½"

Compatible with:



All MP Rotator Nozzles
Page 54 and 58



Spray Nozzles
Page 75

MP-STAKE-PSR40-CV Installation



MP-STAKE MODELS	
Model	Description
MP-STAKE	66 cm stake, 0.345" (9 mm) tubing to ½" male fitting, PROS-00 shrub adapter (total height: 71 cm)
MP-STAKE-PSR40-CV	66 cm stake, 0.345" (9 mm) tubing to ½" male fitting, Hunter Check Valve, PROS-00-PSR40 pressure-regulated shrub adapter (total height: 86 cm)